

# New method to test a neutron electro-neutrality

Voronin Vladimir

Petersburg nuclear physics institute


PSI-2013

# Motivation

Electro-neutrality of the free neutron is commonly accepted.

- The zero neutron electric charge is not a request of Standard Model.
- Zero neutron electric charge is the test of physics beyond the Standard Model.
  - Overall, only a few hints exist for physics beyond the Standard Model, and the neutrality of neutrons and atoms is such a hint.
  - Some models beyond the SM violates boson - lepton (  $B - L$  ) symmetry could accommodate a nonzero neutron charge  $q_n = \varepsilon(B - L) \neq 0$ , but the charge of the hydrogen atom (which has  $B = L$  ) would remain zero.
  - Some variants of theories with additional extra dimensions give the possibility to have non-zero neutron electric charge.

# Neutron electric charge experiment<sup>1</sup>



Parameters of the setup  
 $L = 9\text{m}$ ,  $\lambda = 17.5\text{\AA}$ ,  
 $E = 60\text{ kV/cm}$ .

Reached accuracy

$$q_n = (-0.4 \pm 1.1)10^{-21} \cdot e$$


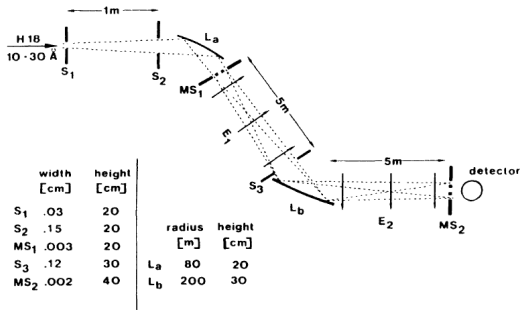


FIG. 1. The design of the deflection apparatus. MS<sub>1</sub> and MS<sub>2</sub> is a multislit system with 31 slits, 30 μm wide, separated by 30-μm-wide absorbing zones. For clarity the dimensions and angles of deflection are not to scale.

<sup>1</sup>J.Baumann, R.Gahler, J.Kalus, W.Mampe, PR D37, 3107 (1988)

# SESANS method

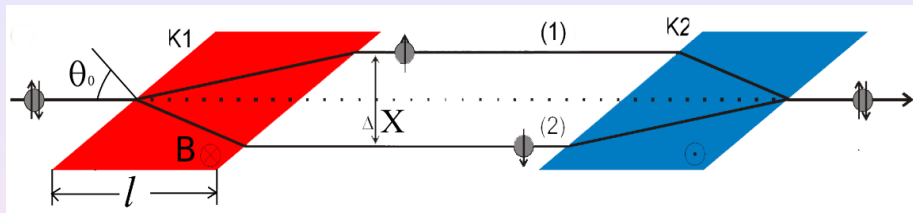


Neutron beam polarization  $\mathbf{P}$  is directed perpendicularly to guiding magnetic field  $B$ . Neutron wave function can be written in form

$$\psi_{in} = \frac{1}{\sqrt{2}} \begin{pmatrix} e^{-\frac{i\varphi_0}{2}} \\ e^{+\frac{i\varphi_0}{2}} \end{pmatrix},$$

here  $\varphi_0$  - neutron spin direction in azimuthally plane. Let's consider  $\mathbf{P}$  parallel to X-axis ( $\varphi_0 = 0$ )  $\Rightarrow \mathbf{P} = (1, 0, 0)$

# SESANS method - II

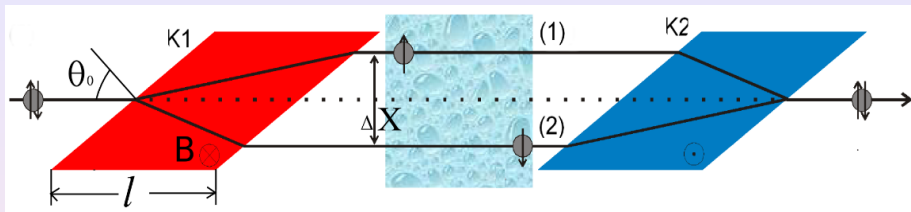


Let's apply  $V_{sr}(x)$ . The phase difference between these two eigenstates will be

$$\varphi_{sr} = (V_{sr}(x_0) - V_{sr}(x_0 + \Delta x)) / \hbar \cdot \tau,$$

The neutron wave function on the exit of coil K2 will be

$$\psi_{out} = \frac{1}{\sqrt{2}} \begin{pmatrix} e^{-\frac{i\varphi_{sr}}{2}} \\ e^{+\frac{i\varphi_{sr}}{2}} \end{pmatrix} \Rightarrow \mathbf{P} = (\cos \varphi_{sr}, \sin \varphi_{sr}, 0)$$

# Electric field

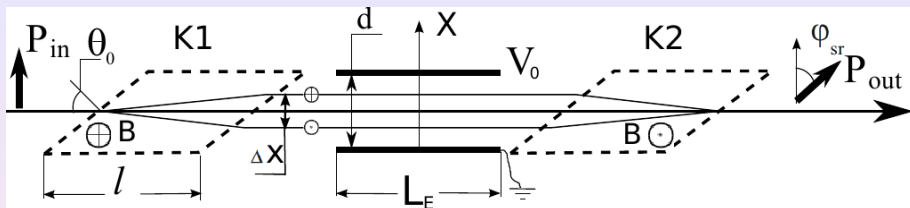

Electric field is applied  $V_E(x) = E_0 \cdot x$ .


The spin rotation angle will be:

$$\phi_e = \frac{E_0 q_n \Delta x}{\hbar} \cdot \tau$$

The value of spatial splitting  $\Delta x$  is

$$\Delta x = \frac{\mu B}{E} \cdot l \cdot \tan \theta_0$$

# Numerical estimations



## Neutron beam splitting

$$\Delta x = \frac{\lambda_n^2 l B \tan(\theta_0) \gamma m_n}{4\pi^2 \hbar}$$

## Phase shift due to neutron electric charge

$$\phi_e = E_0 q_n l L_E B \tan \theta_0 \gamma \frac{\lambda_n^3 m_n^2}{8\pi^3 \hbar^3},$$


Numerical estimations show, that under the conditions ( $B = 0.1\text{T}$ ,  $L_E = 1\text{m}$ ,  $l = 1\text{m}$ ,  $E_0 = 100\text{ kV/cm}$ ,  $\tan \theta_0 = 10$ ,  $\lambda_n = 10\text{\AA}$ )

$$\phi_e = 2.6 \cdot 10^{15} \cdot e_n.$$

where  $e_n = q_n/e$ . The accuracy of  $\Delta\phi_e \simeq 10^{-5}$  corresponds to potential gradient  $\simeq 4 \cdot 10^{-16}\text{ eV/cm}$  and neutron electric charge  $\sigma(e_n) \simeq 4 \cdot 10^{-21}$ .

# Measurement a neutron refraction by SESANS<sup>2</sup>

SESANS at WWR-M reactor  
(PNPI, Gatchina)



Neutron length wave -  $2.3 \text{ \AA}$ ,


$B = (40 \div 800) \text{ Oe}$

$\theta_0 = 45^\circ$

$l = 50 \text{ cm}$

$\Delta x$  reached about  $200 \text{ nm}$ .

Example of experimental curves

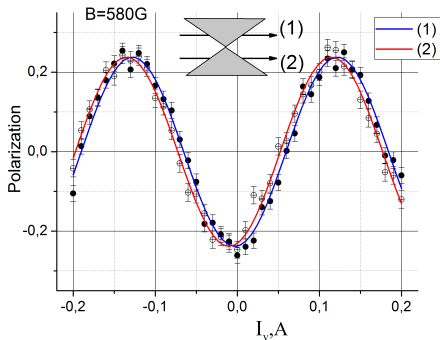


We use the quartz crystal prism with the vertex angle about  $156^\circ$  for neutron beam refraction.

<sup>2</sup>Thanks to Axelrod L.A. and Zabenkin V.N.



# Neutron refraction in quartz prism




Value of phase shift due to refraction in prism

$$\Delta\varphi_r = \frac{V_0}{E} \frac{2\pi}{\lambda} \Delta x \tan \alpha$$


The used quartz prism

$$V_0 \simeq 10^{-7} \text{ eV}, \alpha = 78^\circ$$

The phase shift dependence on a value of magnetic field in main coils.

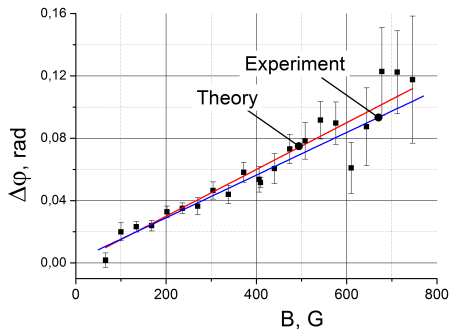

# Laue diffraction in perfect crystal



Symmetrical Laue diffraction.

$\mathbf{j}_{(1)}$  and  $\mathbf{j}_{(2)}$  are the neutron fluxes for two direction of incident beam.

## Effect of diffraction enhancement



The neutron in the crystal changes the momentum direction by the angle of  $\Omega$  (by **several tens degrees**) while the incident neutron beam deflects by the Bragg width (**within a few arc seconds**)

$$\Omega = \Delta\theta \cdot \frac{E}{2v_g} \Rightarrow \Delta\theta \cdot 10^5$$


The same phenomenon occurs then not direction but neutron energy is changed according to the

$$\Delta\theta = \frac{\Delta E}{2E} \tan \theta_B$$

# Measurement the neutron prism refraction<sup>3</sup>

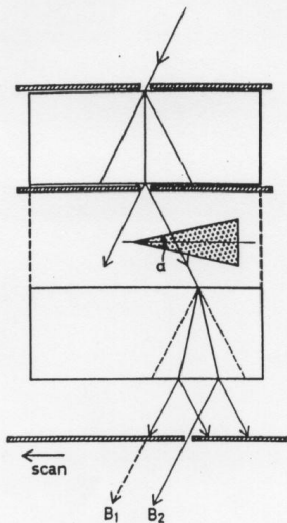



⇐ no refracting prism



⇐ 0.032 arc sec =  
=  $1.5 \cdot 10^{-7}$  rad  
refracting prism

<sup>3</sup>S.Kikuta et al., J. Phys. Soc. Japan, **39** (1975) 471

# Change neuron length wave in magnetic field<sup>4</sup>

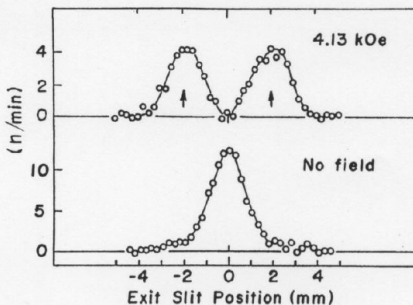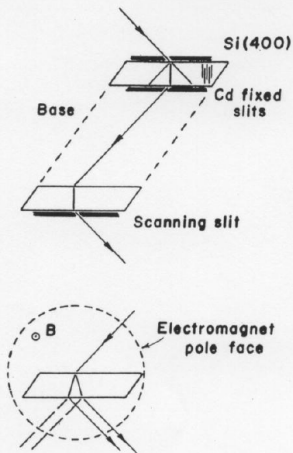


⇐ 4.13 kOe  
magnetic field

⇐ no magnetic  
field

<sup>4</sup>A. Zeilinger, C.G. Shull, Phys. Rev. B **19** (1979) 3957

# SESANS + Laue diffraction

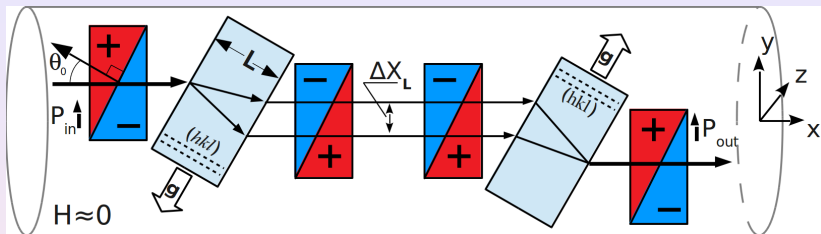

The values of neutron splitting

Laue diffr.+SESANS

Standard SESANS

$$\Delta X_L = \frac{\mu B}{v_g} L \sin \theta_B \cdot \tan \theta_0 \iff \Delta X = \frac{\mu B}{E} \cdot l \cdot \tan \theta_0$$

**About  $K_g = \frac{E}{v_g} \Rightarrow 10^5$  times more.**

$\Delta X_L$  for silicon (220) and (100) quartz planes,  $L = 10$  cm,  $\tan \theta_0 = 1$  and  $\theta_B = 65^\circ$  can be  $\sim 20\mu\text{m}$  and  $\sim 60\mu\text{m}$  for the  $B = 1$  G.

# Sensitivity of SESANS + Laue

## Statistical sensitivity

$$\phi_e = \frac{E_0 e_n \Delta X_L}{\hbar} \cdot \frac{L_E}{v_n} = 3 \cdot 10^{17} \cdot e_n$$

For the (100) quartz plane ( $d=4.255\text{\AA}$ ,  $v_g = 1.8 \cdot 10^{-8}\text{eV}$ ),  
 $\theta_B = 65^\circ$ ,  $L = 10\text{cm}$ ,  $\tan \theta_0 = 3$ ,  $B = 100\text{G}$

**100 day of statistics accumulation  $\Rightarrow$**

$$\sigma(e_n) \simeq 3 \cdot 10^{-23}$$

## Systematic

	$\Delta X_L$	$E_0$	$H_r$	$H_{lc}$	$[v \times E_0]$	$e_n$
1	+	+	+	-	-	+
2	+	-	+	+	+	-
3	-	+	-	-	-	-
4	-	-	-	+	+	+

The combination of  
measurements

**(1-2)-(3-4)**

give us the effect

due to  $e_n$

# Summary

## New approach to test a neutron electroneutrality is proposed.

- It is based on using spin interferometer technique realised in the **SESANS apparatuses**
- The sensitivity of the proposed technique can be a few  $10^{-21}$  e, that is **about the best current accuracy**
- The demonstration experiment to test the possibility to measure phase shift caused by neutron refraction in media was done. **The results fully coincide with the theoretical expectation.**
- There is a possibility to improve the method accuracy on a few orders based on a neutron Laue diffraction in a perfect crystal